

# TL Energy Canopy Lights

### Features and Benefits

- 50, 90 Watt Low Power and High Performance
- Individual high performance LED Light engine with Cree XT-E LED delivering 100 Lumen per watt
- Patented thermal management allows ambient working temperature
- Easiest installation and maintenance experiences guaranteed: Easiest one Man operation, hinged LED light engine holder, quick connector between LED light engine and diver
- IP65, IP67 upgrade option, 4 Available mounting options
- Light Fixture Material: Aluminum Alloy
- Certification Pending: UL wet location, TUV, Design Lights Consortium, Lighting Facts
- Rated Lifetime: up to 50,000 hours, 5 Year Warranty\*
- UV, IR and Mercury-free
- UL-Dry and Damp Locations



**Dimmable**

**Reduces Energy & Cost**

**No Lead or Mercury**




50W



90W

Part Number:	Replaces:	Wattage:	Dimmable:	CRI:	Lumens:	LED Chip	Beam Angle:	Dimensions (in inches):
EL-MD-50-45K(GL)	150W HID	50	Yes	≥70	4500-4600	Cree XT-E, 24pcs	120°	8" x 5"
EL-MD-50-55K(GL)	150W HID	50	Yes	≥70	4500-4600	Cree XT-E, 24pcs	120°	8" x 5"
EL-MD-90-45K(GL)	250W HID	90	Yes	≥70	7500-8100	Cree XT-E, 42pcs	120°	15.7" x 7"
EL-MD-90-55K(GL)	250W HID	90	Yes	≥70	7500-8100	Cree XT-E, 42pcs	120°	15.7" x 7"

Voltage:	Life Hours:	Power Factor:	Operating Frequency:	Operating Temperature:	Color Temperature(CCT):	Case Quantity:	Indoor/Outdoor:	Certified Installer Required:
100-277V	Up to 50000	>0.95	47-63Hz	-30° C to 60° C	4500~5500K 2500~5500K (Optional)	1	Both	Yes

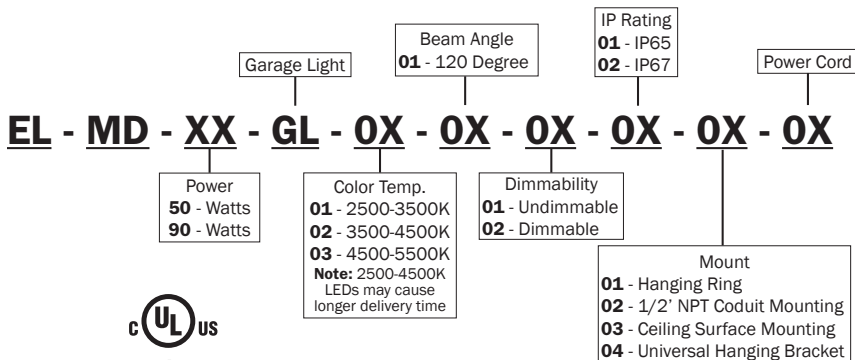

### Applications

- Residential
- Office
- Retail
- Restaurant
- School
- Hospital
- Hotel/Motel



**Notes: Power Cord:** 01 - 3m Australian standard cord c/w plug  
 02 - 1m European standard cord  
 03 - 1m American standard cord  
 04 - Others

\*For warranty terms please visit our website Trans-Lux.com



Trans-Lux Energy Corporation  
 300 N Elizabeth St Suite 610c  
 Chicago, IL 60607  
 800.559.8197 • www.Trans-Lux.com

**OUTDOOR**  
Canopy

Certifications:  
RoHS

0106