

1X Universal Post Top Kit

Features and Benefits

- 75, 85, 95 and 135 Watt Low Power and High Performance
- Multiple temperature control values
- Over temperature protection, shut down at critical temperature and resume operation temperature
- Under-voltage lockout for power off or brownout
- 0-10V Dimming compatible
- 0-10V Input Port
- Occupancy sensing Current accuracy over the LED operating temperature range +/- 3%
- Rated life 100,000 hours
- 10 Year Warranty*
- UV, IR and Mercury - free
- UL-Dry and Damp Location



10 Year Warranty

Reduces Energy & Cost

No Lead or Mercury



Yoke Application Available


Part Number:	Wattage:	Dimmable:	Lumens:	Voltage:	Life Hours:	Color Temperature(CCT):
GTP-UNVPT-1X5498	75	Yes	7814	120/277v	100,000	2700K - 5700K
GTP-UNVPT-1X5498	85	Yes	8999	120/277v	100,000	2700K - 5700K
GTP-UNVPT-1X5498	95	Yes	9447	120/277v	100,000	2700K - 5700K
GTP-UNVPT-1X5498	135	Yes	13164	120/277v	100,000	2700K - 5700K

Minimum Fixture Diameter:	Maximum Fixture Diameter:	Dimensions (in inches):	Operating Temperature:	Indoor/Outdoor:	Certified Installer Required:
11" inches	22" inches	8" x 8"	-40 °C to 85 °C	Both	Yes

Applications

- Cobrahead
- Shoebox
- Canopy
- Parking Lot
- Highbay
- Lowbay
- Wall Pack

GTP-UNVPT - 1X5498 -

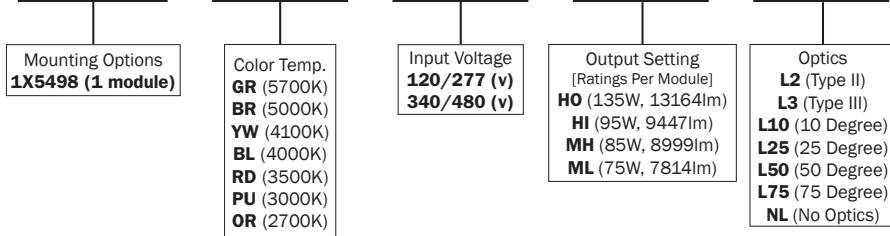

DLC Certified in 95W & 135W settings

Certifications:
RoHS, ETL Listed



DESIGNLIGHTS
CONSORTIUM

*For warranty terms please visit our website Trans-Lux.com



Trans-Lux Energy Corporation
300 N Elizabeth St Suite 610c
Chicago, IL 60607
800.559.8197 • www.Trans-Lux.com

RETROFITS
Plate