

# 15W 4ft TLSecond GEN T8 LED Tube

**INDOOR**  
Linear Tube

**Features and Benefits**

- 15 Watt Low Power and High Performance
- Energy savings about 70%
- Unique aesthetics for commercial grade fixtures
- Excellent efficacies of up to 100 lm/W
- For Dimmable Tubes: 0-10V Dimming
- Available with internal and external drivers
- Rated Lifetime: 50,000 hours
- 5 Year Warranty\*
- UV, IR and Mercury-free




**5 Year Warranty**

**Reduces Energy & Cost**

**No Lead or Mercury**

Part Number:	Description:	Dimmable:	CCT:	Lumens:	CRI:
<b>Single End Tubes</b>					
TL-T8-15W1200 BINS30F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	3000K	1650	≥83
TL-T8-15W1200 BINS35F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	3500K	1650	≥83
TL-T8-15W1200 BINS40F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	4000K	1750	≥83
TL-T8-15W1200 BINS45F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	4500K	1750	≥83
TL-T8-15W1200 BINS50F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	5000K	1850	≥83
<b>Single End Tubes</b>					
TL-T8-15W1200 BINS30C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	3000K	1650	≥83
TL-T8-15W1200 BINS35C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	3500K	1650	≥83
TL-T8-15W1200 BINS40C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	4000K	1750	≥83
TL-T8-15W1200 BINS45C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	4500K	1750	≥83
TL-T8-15W1200 BINS50C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	5000K	1850	≥83

Voltage:	Power Factor:	Operating Temperature:	Life Hours:	Case Quantity:	Dimensions (in inches):	Indoor/Outdoor:	Certified Installer Required:
100-277 VAC	> 0.9	-10°C to 30°C	50,000	25 pcs	48" x 1.3"	Indoor	Yes

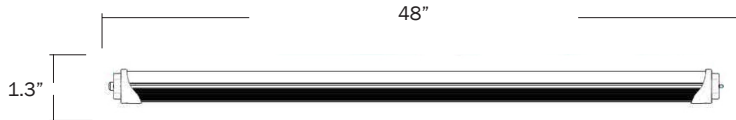

**Applications**

- Healthcare
- Hospitality
- Office
- Property Management
- Residential
- Retail



Certifications:  
RoHS, ETL Listed



\*For warranty terms please visit our website Trans-Lux.com



Trans-Lux Energy Corporation  
300 N Elizabeth St Suite 610c  
Chicago, IL 60607  
800.559.8197 • www.Trans-Lux.com

# 15W 4ft TLSecond GEN T8LED Tube

Part Number:	Description:	Dimmable:	CCT:	Lumens:	CRI:
<b>Two End Tubes</b>					
TL-T8-15W1200 BINT30F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	3000K	1650	≥83
TL-T8-15W1200 BINT35F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	3500K	1650	≥83
TL-T8-15W1200 BINT40F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	4000K	1750	≥83
TL-T8-15W1200 BINT45F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	4500K	1750	≥83
TL-T8-15W1200 BINT50F	Frosted 4' 15 Watt T8 Tube, Internal Driver	No	5000K	1850	≥83
<b>Two End Tubes</b>					
TL-T8-15W1200 BINT30C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	3000K	1650	≥83
TL-T8-15W1200 BINT35C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	3500K	1650	≥83
TL-T8-15W1200 BINT40C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	4000K	1750	≥83
TL-T8-15W1200 BINT45C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	4500K	1750	≥83
TL-T8-15W1200 BINT50C	Clear 4' 15 Watt T8 Tube, Internal Driver	No	5000K	1850	≥83
<b>Single End Tubes</b>					
TL-T8-15W1200 BIDS30F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	3000K	1650	≥83
TL-T8-15W1200 BIDS35F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	3500K	1650	≥83
TL-T8-15W1200 BIDS40F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	4000K	1750	≥83
TL-T8-15W1200 BIDS45F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	4500K	1750	≥83
TL-T8-15W1200 BIDS50F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	5000K	1850	≥83
<b>Single End Tubes</b>					
TL-T8-15W1200 BIDS30C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	3000K	1650	≥83
TL-T8-15W1200 BIDS35C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	3500K	1650	≥83
TL-T8-15W1200 BIDS40C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	4000K	1750	≥83
TL-T8-15W1200 BIDS45C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	4500K	1750	≥83
TL-T8-15W1200 BIDS50C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	5000K	1850	≥83
<b>Two End Tubes</b>					
TL-T8-15W1200 BIDT30F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	3000K	1650	≥83
TL-T8-15W1200 BIDT35F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	3500K	1650	≥83
TL-T8-15W1200 BIDT40F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	4000K	1750	≥83
TL-T8-15W1200 BIDT45F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	4500K	1750	≥83
TL-T8-15W1200 BIDT50F	Frosted 4' 15 Watt T8 Tube, Internal Driver	Yes	5000K	1850	≥83
<b>Two End Tubes</b>					
TL-T8-15W1200 BIDT30C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	3000K	1650	≥83
TL-T8-15W1200 BIDT35C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	3500K	1650	≥83
TL-T8-15W1200 BIDT40C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	4000K	1750	≥83
TL-T8-15W1200 BIDT45C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	4500K	1750	≥83
TL-T8-15W1200 BIDT50C	Clear 4' 15 Watt T8 Tube, Internal Driver	Yes	5000K	1850	≥83