

Edge™ LED Highbay

INDOOR
Highbay

Features and Benefits

- Up to 450 Watt Low Power and High Performance
- Flexible, modular design
- Multiple choice of optical lenses
- System Light Efficacy > 100LPW
- IP66
- Rated Lifetime: up to 100,000 hours, 5 Year Warranty*
- UV, IR and Mercury-free



5 Year Warranty

Reduces Energy & Cost

No Lead or Mercury



100W




150W



200W

Part Number:	Replaces:	Wattage:	Dimmable:	CRI:	Lumens:	LED Chip:	Beam Angle:	Dimensions (in inches):
TL-EO-ED-100(HB)	250W HID	100	No	≥80	≥10000	OSRAM, 112pcs	90°	13" x 14.4" x 8.9"
TL-EO-ED-150(HB)	400W HID	150	No	≥80	≥15000	OSRAM, 168pcs	90°	17.1" x 14.4" x 8.9"
TL-EO-ED-200(HB)	750W HID	200	No	≥80	≥20000	OSRAM, 224pcs	90°	21.3" x 14.4" x 8.9"

Voltage:	Life Hours:	Power Factor:	Operating Frequency:	Operating Temperature:	Color Temperature(CCT):	Case Quantity:	Indoor/Outdoor:	Certified Installer Required:
100-277V	L70 > 100,000	>0.95	46-63Hz	-30° C to 45° C	4500~5500K 2500~5500K (Optional)	1	Indoor	Yes

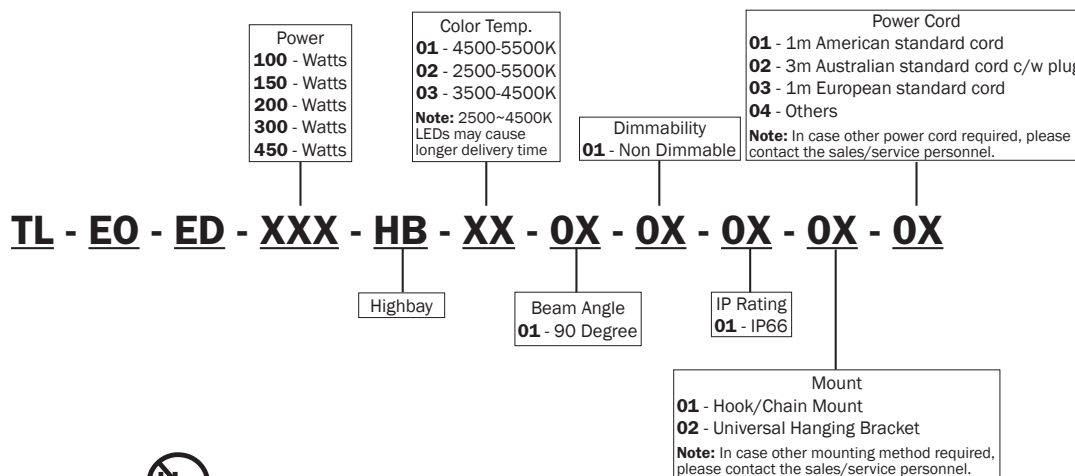

Applications

- Warehouse and Manufacturing Facilities
- Convention Centers and Sporting Arenas
- Big-Box Retail Stores
- Roof Top Lighting
- Cold Storage Facilities
- Gymnasiums



Certifications:
ETL, CE, RoHS



Trans-Lux Energy Corporation
300 N Elizabeth St Suite 610c
Chicago, IL 60607
800.559.8197 • www.Trans-Lux.com

Edge™ LED Highbay

INDOOR
Highbay



300W



450W

Part Number:	Replaces:	Wattage:	Dimmable:	CRI:	Lumens:	LED Chip:	Beam Angle:	Dimensions (in inches):
TL-EO-ED-300(HB)	1000W HID	300	No	≥80	≥30000	OSRAM, 336pcs	90°	29.5" x 14.4" x 8.9"
TL-EO-ED-450(HB)	1500W HID	450	No	≥80	≥45000	OSRAM, 504pcs	90°	41.9" x 11.2" x 3.7"

Voltage:	Life Hours:	Power Factor:	Operating Frequency:	Operating Temperature:	Color Temperature(CCT):	Case Quantity:	Indoor/Outdoor:	Certified Installer Required:
100-277V	L70>100,000	>0.95	46-63Hz	-30°C to 45°C	4500~5500K 2500~5500K (Optional)	1	Indoor	Yes

