

Exit Signs Round Retrofit Kits Specification

Features and Benefits

- 0.7 Watt Low Power and High Performance
- Rugged construction
- Made to retrofit into existing exit signs for maximum energy efficiency
- Unit has a patented swivel base that allows for perfect positioning in the exit sign
- Directs light output where you need it the most in existing exit signs!
- Life expectancy 10 years at full lumen output
- UV, IR and Mercury-free
- UL-Dry and Damp Location

**Indoor/
Outdoor**


**Reduces
Energy & Cost**

**No Lead or
Mercury**



| Part Number: | Description: | Wattage: | Dimensions (in inches): | Voltage: | Certifications: |
|--------------|--|----------|-------------------------|----------|---|
| 20710 | One Red LED Lamp, Candelabra Base | 0.7W | 4.70" x 1.25" | 120V | UL, cUL, UL924 |
| 20711 | One Red LED Lamp, Candel. Base, 2 Adapt. | 0.7W | 4.70" x 1.25" | 120V | UL, cUL, UL924 |
| 20714 | Two Red LED Lamps, Candel. Base, 4 Adapt. | 0.7W | 4.70" x 1.25" | 120V | UL, cUL, UL924 |
| 20720 | Two Red LED Lamps, Candel. Base, 4 Adapt. Plus Red Diffuser Panel. | 0.7W | 4.70" x 1.25" | 120V | ETL, CETL, Listed to UL924 Listed Standards |
| 20799 | Socket Adaptor Candelabra to Bayonet Base | | 1.00" x 0.50" | | |
| 20798 | Socket Adaptor Candelabra to Intermediate | | 1.00" x 0.50" | | |
| 20797 | Socket Adaptor Candelabra to Medium Base | | 1.00" x 0.50" | | |

| Power Factor: | Indoor/ Outdoor: | Retrofit/ New Fixture: | Certified Installer Required: |
|---------------|---------------------|---------------------------|----------------------------------|
| >.57" | Both | New Fixture | Yes |

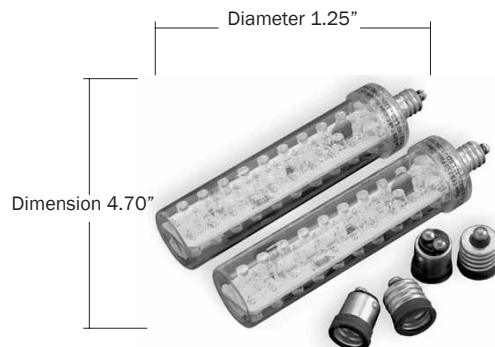

Applications

- Residential
- Office
- Retail
- Restaurant
- School
- Hospital
- Hotel/Motel



Certifications:
RoHS, ETL Listed



Trans-Lux Energy Corporation
300 N Elizabeth St Suite 610c
Chicago, IL 60607
800.559.8197 • www.Trans-Lux.com