

# LED 7 Watt MR16: GU5.3, GU10, and PAR16

**INDOOR**  
MR16, PAR16

**Features and Benefits**

- 7 Watt Low Power and High Performance
- Up to 85% less energy than
- Smooth, uniform dimming
- Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp
- Track or down light installations are not strained by excess weight
- Shatter resistant
- Rated Lifetime: 25,000 hours
- 5 Year Warranty\*
- UV, IR and Mercury-free
- UL-Dry Location



GU5.3

GU10

PAR16


**5 Year Warranty**

**Reduces Energy & Cost**

**No Lead or Mercury**

Color Temperature(CCTK):	Part Number:	Description:	Lumens:	CBCP:	CRI:	CCT:	Beam Angle:	Voltage:
<b>2400K</b>	<b>12V MR16 GU5.3</b>							
	LED712VMR1624KNFL	Dimmable 7W MR16 GU10	500	TBD	82	2400	20°	12 VAC
	LED712VMR1624KFL	Dimmable 7W MR16 GU10	500	TBD	82	2400	40°	12 VAC
	<b>120V MR16 GU10</b>							
	LED7MR16GU1024KNFL	Dimmable 7W MR16 GU10	500	TBD	82	2400	20°	120V
	LED7MR16GU1024KFL	Dimmable 7W MR16 GU10	500	TBD	82	2400	40°	120V
<b>120V PAR16</b>								
LED7P1624KNFL	Dimmable 7W PAR16	500	TBD	82	2400	20°	120V	
LED7P1624KFL	Dimmable 7W PAR16	500	TBD	82	2400	40°	120V	

Voltage:	Operating Frequency:	Operating Temperature:	Life Hours:	Dimensions (in inches):	Case Quantity:	Indoor/Outdoor:	Certified Installer Required:
120 VAC	50/60 Hz	-40 °C to 50 °C	25,000	2" x 2" 2" x 2.5" 2" x 3"	12	Indoor	No

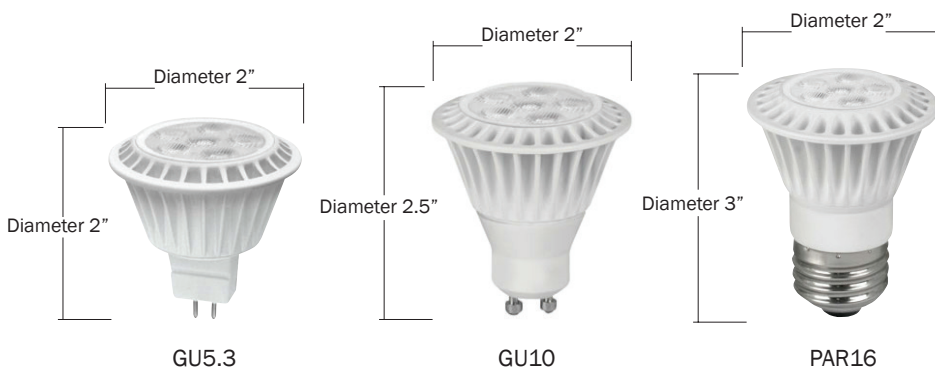

**Applications**

- Display Lights
- Recessed Downlights
- Track Lights
- Hotels
- Casinos
- Restaurants
- Commercial Buildings
- Residential
- Theaters
- Outdoor fixtures that protect from elements



**Certifications:**  
RoHS, ETL Listed



Trans-Lux Energy Corporation  
300 N Elizabeth St Suite 610c  
Chicago, IL 60607  
800.559.8197 • www.Trans-Lux.com

## LED 7 Watt MR16: GU5.3, GU10, and PAR16

**INDOOR**  
**MR16, PAR16**

Color Temperature(CCTK):	Part Number:	Description:	Lumens:	CBCP:	CRI:	CCT:	Beam Angle:	Voltage:	
<b>2700K</b>	<b>12V MR16 GU5.3</b>								
	LED712VMR1627KNFL	Dimmable 7W MR16 GU5.3	500	3296	82	2400	20°	12 VAC	
	LED712VMR1627KFL	Dimmable 7W MR16 GU5.3	500	1057	82	2400	40°	12 VAC	
	<b>120V MR16 GU10</b>								
	LED7MR16GU1027KNFL	Dimmable 7W MR16 GU10	500	3296	82	2400	20°	120V	
	LED7MR16GU1027KFL	Dimmable 7W MR16 GU10	500	1057	82	2400	40°	120V	
	<b>120V PAR16</b>								
	LED7P1627KNFL	Dimmable 7W PAR16	500	3296	82	2400	20°	120V	
	LED7P1627KFL	Dimmable 7W PAR16	500	1057	82	2400	40°	120V	
	<b>3000K</b>	<b>12V MR16 GU5.3</b>							
LED712VMR1630KNFL		Dimmable 7W MR16 GU5.3	525	3296	82	2400	20°	12 VAC	
LED712VMR1630KFL		Dimmable 7W MR16 GU5.3	525	1057	82	2400	40°	12 VAC	
<b>120V MR16 GU10</b>									
LED7MR16GU1030KNFL		Dimmable 7W MR16 GU10	525	3296	82	2400	20°	120V	
LED7MR16GU1030KFL		Dimmable 7W MR16 GU10	525	1057	82	2400	40°	120V	
<b>120V PAR16</b>									
LED7P1630KNFL		Dimmable 7W PAR16	525	3296	82	2400	20°	120V	
LED7P1630KFL		Dimmable 7W PAR16	525	1057	82	2400	40°	120V	
<b>4100K</b>		<b>12V MR16 GU5.3</b>							
	LED712VMR1641KNFL	Dimmable 7W MR16 GU5.3	550	3296	82	2400	20°	12 VAC	
	LED712VMR1641KFL	Dimmable 7W MR16 GU5.3	550	1057	82	2400	40°	12 VAC	
	<b>120V MR16 GU10</b>								
	LED7MR16GU1041KNFL	Dimmable 7W MR16 GU10	550	3296	82	2400	20°	120V	
	LED7MR16GU1041KFL	Dimmable 7W MR16 GU10	550	1057	82	2400	40°	120V	
	<b>120V PAR16</b>								
	LED7P1641KNFL	Dimmable 7W PAR16	550	3296	82	2400	20°	120V	
	LED7P1641KFL	Dimmable 7W PAR16	550	1057	82	2400	40°	120V	