


LED Tri-Proof Light

INDOOR
Linear Fixture

Features and Benefits

- 20, 30, 40, 50 and 65 Watt Low Power and High Performance
- Linkable connectors
- IP66 waterproof, dust, corrosion and pressure-proof
- High stability isolated driver
- Excellent heat dissipation
- Widely used for ambient lighting application
- Maximum efficacy and minimum glare
- High-tech optical design
- Rated Lifetime: 50,000 hours
- 3 Year Warranty*
- UV, IR and Mercury-free

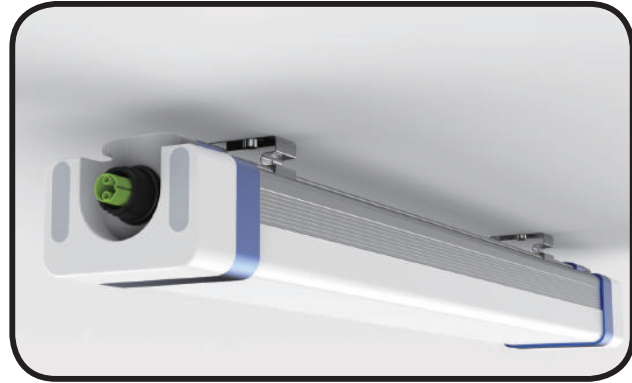

3 Year Warranty

Reduces Energy & Cost

No Lead or Mercury

Part Number:	Wattage:	Frosted Cover		Clear Cover		CRI:	Beam Angle:	Length (in feet):
		Lumens:	Light Efficacy (lm/w):	Lumens:	Light Efficacy (lm/w):			
TLL07G/600mm	20	1900	95	2100	105	≥80	120°	2'
TLL07G/900mm	30	2850	95	3150	105	≥80	120°	3'
TLL07G/1200mm	40	3800	95	4200	105	≥80	120°	4'
TLL07G/1500mm	50	4750	95	5250	105	≥80	120°	5'
TLL07G/1500mm-A	65	6175	95	6825	105	≥80	120°	5'

Emergency Box Option



- External driver with NI-MH battery
- 3 hours emergency lighting industry standard


Voltage:	CCT:	Life Hours:	Power Factor:	Operating Temperature:	Indoor/Outdoor:	Certified Installer Required:
AC100~277V	3000K 4000K 5000K 6500K	50,000	>0.92	-20°C to 40°C	Both	Yes

Applications

- Supermarket
- Tunnel
- Train/Bus Station
- Parking Garage
- Airport
- Warehouse
- Gas Station
- Stairway

Wire And Connectors

Note: About linkable connectors and wire are separated, you can choose what you need the length of the wire then link to the connector tightly with screw driver.

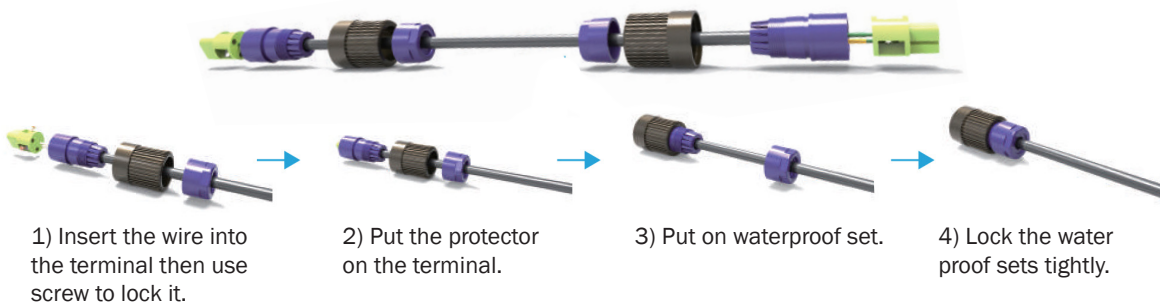

Certifications:
RoHS, CE, FCC



Trans-Lux Energy Corporation
300 N Elizabeth St Suite 610c
Chicago, IL 60607
800.559.8197 • www.Trans-Lux.com