

TL Energy Shoebox

Features and Benefits

- Up to 300 Watt Low Power and High Performance
- 1000W Metal Halide Shoebox replacement
- Individual high performance LED Light engine with Cree XT-E LED delivering 100 Lumen per watt
- Patented thermal management allows ambient working temperature
- Traditional shoesbox housing for easy use and installation: Easiest one-man operation, Hinged LED light engine holder, quick connector between LED light engine and driver
- Light Fixture Material: Aluminum Alloy
- Dimmable and motion sensor control compatible
- Certification Pending: UL wet location, TUV, Design Lights Consortium, Lighting Facts
- Rated Lifetime: up to 50,000 hours, 5 Year Warranty*
- UV, IR and Mercury-free
- UL-Dry Locations



OUTDOOR Shoebox

Dimmable

Reduces Energy & Cost

No Lead or Mercury



50W



100W




150W



150W

Part Number:	Replaces:	Wattage:	Dimmable:	CRI:	Lumens:	LED Chip	Beam Angle:	Dimensions (in inches):
EL-MD-90-55K(HB)	250W HID	90	Yes	≥70	7500-8100	Cree XT-E, 42pcs	120°	16.53" x 6.61"
EL-MD-120-55K(HB)	400W HID	120	Yes	≥70	9800-10600	Cree XT-E, 144pcs	120°	16.53" x 6.61"
EL-MD-200-55K(HB)	750W HID	200	Yes	≥70	16700-18100	Cree XT-E, 216pcs	120°	23.70" x 10.11"
EL-MD-300-55K(HB)	1000W HID	300	Yes	≥70	25000-27000	Cree XT-E, 216pcs	120°	23.70" x 10.11"

Voltage:	Life Hours:	Power Factor:	Operating Frequency:	Operating Temperature:	Color Temperature(CCTK):	Case Quantity:	Indoor/Outdoor:	Certified Installer Required:
100-277V	Up to 50,000	>0.95	47-63Hz	-30 °C to 45 °C	4500~5500K 2500~5500K (Optional)	1	Both	Yes

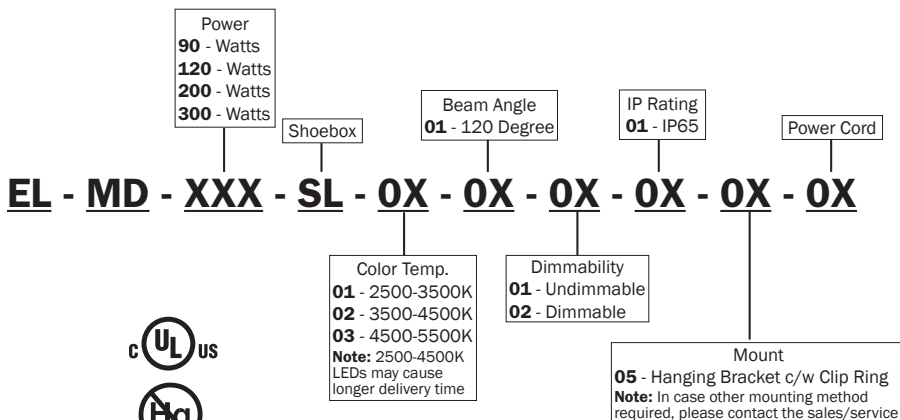

Applications

- Residential
- Office
- Retail
- Restaurant
- School
- Hospital
- Hotel/Motel



Certifications:
RoHS

0109

Notes: Power Cord: 01 - 3m Australian standard cord c/w plug
02 - 1m European standard cord
03 - 1m American standard cord
04 - Others



Trans-Lux Energy Corporation
300 N Elizabeth St Suite 610c
Chicago, IL 60607
800.559.8197 • www.Trans-Lux.com