


FAIR-PLAY MULTI-PURPOSE SCOREBOARD

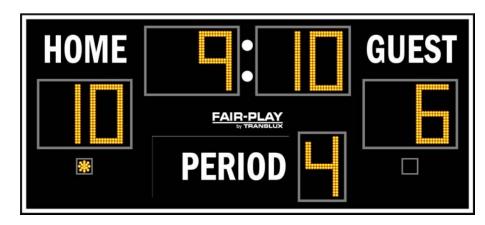

MODEL: MP-8109-2

DIMENSIONS:

STANDARD EQUIPMENT:

- Super-bright, wide-angle amber LED's
- Factory authorized national and local sales, service and installation
- Choose from 10 durable paint colors Free
- Choose from 15 popular vinyl trim colors Free
- Free Help Desk Support
- Free project design renderings
- Over 75 years of sports scoring experience
- Sport specific control console inserts
- Energy efficient LED designs
- HB-800 data connection kit
- Choice of Fair-Play's scorekeeper approved score systems*
- 4-level control console display brightness adjustment
- Changeable scoreboard game captions*
- 5-year limited warranty
- ETL/CETL listed to UL standard
- Convenient built-in service points for easyaccess
- Quality engineered water resistant aluminum construction
- Complete, safe and durable display mounting system
- 7-segment digits
- · Built in lighting suppressor

OPTIONAL EQUIPMENT:

- Custom paint & vinyl trim colors
- UV resistant paint
- Illuminated & non-illuminated identification & sponsorship signage
- · Custom, unique signage options
- Electronic team names*
- Rear-illuminated scoreboard captions*
- Mono- or full-color electronic message display with Fair-Play's exclusive ProLine® control system
- Carrying case for scoreboard control
- Personalized vinyl home team name
- Truss and decorative steel systems
- Pitch speed display system*
- Pitch count display*
- Field use time*
- Scoreboard sport-conversion captions*
- Integrated scoring and display systems
- Scoreboard caption color (other than white)
- Extended warranties and maintenance contracts

OPERATING TEMPERATURES:

Scoreboard display: -22° to 131° Fahrenheit (-30° to 55° Celsius)

Control console: 32° to 131° Fahrenheit (0° to 55° Celsius)

OTHER DIMENSIONS:

CAPTIONS		DIGIT SIZES	
HOME	6" x 20"	GAME CLOCK	15"
GUEST	6" x 22"	TEAM SCORES	15"
PERIOD	6" x 24"	PERIOD	15"
COLON DIAMETER	2"	INNING	15"
ELECTRICAL			
VOLTAGE	120 VAC		
HERTZ	60		
WATTS	122		
AMPS	2		
PHASE	1		
WIRING	2-Wire + ground		
CIRCUITS REQUIRED	1		
SAFETY LISTING	ETL/CETL	1	



