

# Edge™ LED Flood Lighting

**INDOOR**  
Flood Light

**Features and Benefits**

- Up to 450 Watt Low Power and High Performance
- Flexible, modular design
- Multiple choice of optical lenses
- System Light Efficacy > 100LPW
- IP66
- Rated Lifetime: up to 100,000 hours, 5 Year Warranty\*
- UV, IR and Mercury-free
- Dry and Damp Locations



**5 Year Warranty**


**Reduces Energy & Cost**

**No Lead or Mercury**



Part Number:	Replaces:	Wattage:	Dimmable:	CRI:	Lumens:	LED Chip:	Beam Angle:	Dimensions (in inches):
TL-EO-ED-100(FL)	250W HID	100	No	≥80	≥10000	OSRAM, 112pcs	70°/135°, 90°	13" x 14.4" x 8.9"
TL-EO-ED-150(FL)	400W HID	150	No	≥80	≥15000	OSRAM, 168pcs	70°/135°, 90°	17.1" x 14.4" x 8.9"
TL-EO-ED-200(FL)	750W HID	200	No	≥80	≥20000	OSRAM, 224pcs	70°/135°, 90°	21.3" x 14.4" x 8.9"
TL-EO-ED-300(FL)	1000W HID	300	No	≥80	≥30000	OSRAM, 336pcs	70°/135°, 90°	29.5" x 14.4" x 8.9"
TL-EO-ED-450(FL)	1500W HID	450	No	≥80	≥45000	OSRAM, 504pcs	70°/135°, 90°	41.9" x 11.2" x 8.9"

Voltage:	Life Hours:	Power Factor:	Operating Frequency:	Operating Temperature:	Color Temperature(CCT):	Case Quantity:	Indoor/Outdoor:	Certified Installer Required:
100-277V	L70>100,000	>0.95	46-63Hz	-30°C to 55°C	4500~5500K 2500~5500K (Optional)	1	Indoor	Yes

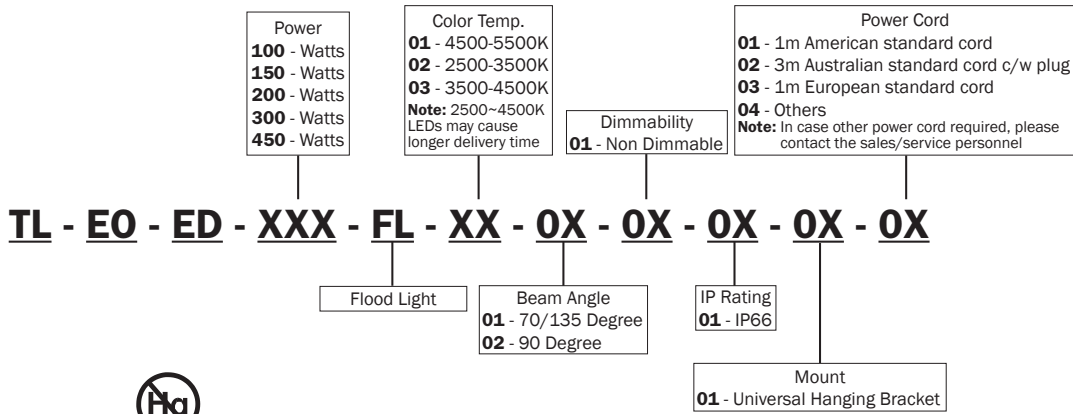

**Applications**

- General Flood Lighting
- Corridor Lighting
- Security Lighting
- Roof Top Lighting
- Residential
- Office
- Retail
- Hospital
- Hotel/Motel

Certifications:  
ETL, CE, RoHS



\*For warranty terms please visit our website Trans-Lux.com

**TLENERGY**  
by **TRANS LUX**

Trans-Lux Energy Corporation  
300 N Elizabeth St Suite 610c  
Chicago, IL 60607  
800.559.8197 • www.Trans-Lux.com